

TFT600/WIFI

Sistema de Control de Acceso por huella dactilar con función de ALARMA




El sistema de control de acceso, TFT600/WIFI, es un producto profesional de control de acceso, combinado, con algoritmos de reconocimiento de huella dactilar, sensores ópticos, tecnología integrada de diseño y aplicación de software, etc. TFT600/WIFI obtiene la máxima seguridad y da el máximo valor a los clientes

Características

- **10.000 huellas dactilares**
- **200.000 registros.**
- Display 65.000 colores reales, alta definción.
- Multilinguaje (Español)
- Funciona de manera independiente o en red.
- Gran capacidad de memoria.
- 24 horas de funcionamiento continuo disponible.
- Guarda los datos durante el corte de energía.
- WIFI

Diagrama de conexión

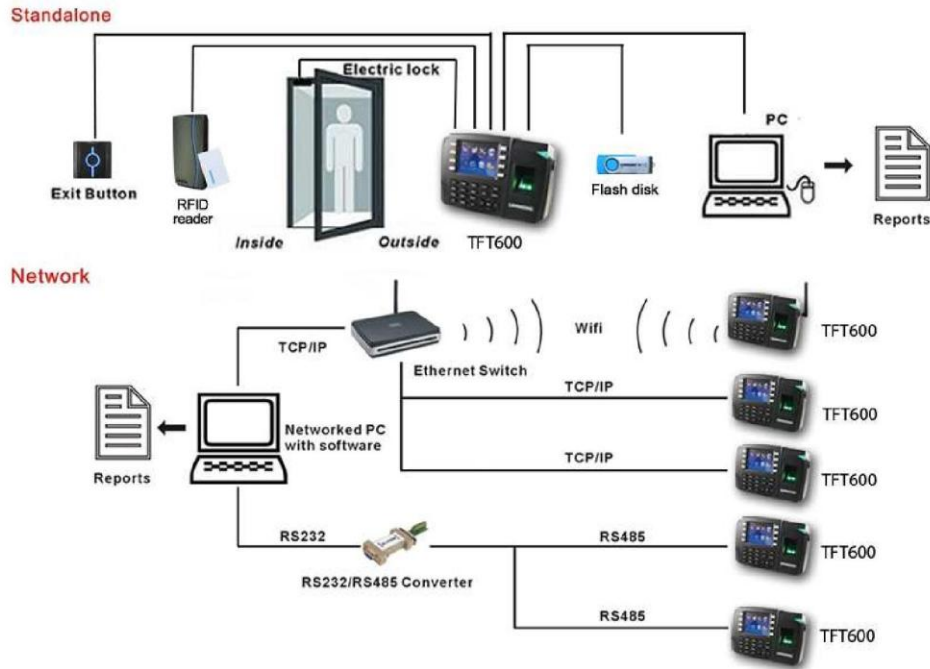

Especificaciones

Display/Speaker	Language
LCD Display: 3.5" TFT high-definition graphical interface, 65,000 real color Speaker: Voice Prompt (language can be selected)	Multi Language, English, French, Spanish, Arabic, etc., for more than 40 languages can be selected
Technical Specifications Capacity	Environment
Fingerprint capacity: 10,000	Operation temperature: 0°C ~ 45°C
Log capacity: 200,000	Operation humidity: 20% ~ 80%
Verification/Identification	Verification/Identification
Verification speed(1:1): ≤0.5s	FRR: ≤0.01%
Identification speed(1:N): ≤1s	FAR: ≤0.0001%
Power Supply	Machine Size
Power: 110/220VAC ~ 12VDC	197(L)*137(W)*46(H)mm
Communication	Attendance status
TCP/IP, RS232/485, USB Host/Client, Wiegand In/out, Speaker Out	Check in, Check out, Break in, Break out, OT in, OT out
Standand Function	Customize Function
Professional access control, built-in relay, 50 time zones, 5 groups and 10 combinations; Dismantlement alarm, break-in alarm, duress alarm; User-defined function key; Auto status, DST; Scheduled bell, SMS, T9 input, Webserver, Work code; Photo-ID; Power lock; Anti-pass back; Selfservice query; Keypad audio	9-PIN ID, Multi-verify, Group identify; Printer output, Li-battery, ID reader, MIFARE reader, Wifi, GPRS